

GF R 16 P ER

Model name GFR16PER (formerly N04PE)
Size (mm) 194 x 887 x 40 (7 3/4" x 34 1/4" x 1 5/8")
Power Consumption 60W (30 lm/W)
Available CCT 2700K~6300K Ergonomic +85 CRI (Optional single CCT)
Illumination values 1990 lm @ 5800K (custom CCT/CRI available)
Material Aluminum anodized, polycarbonate, RoHS
Voltage VAC 95~240, 50~60 Hz
Control method IR Remote controller
Installation Kit. IK-07A




Ver. 08.11

SP Certified to U_L 1598

www.goenergyeffective.com 416.679.0259
 © 2008 GO Lighting Technologies Inc.
 Custom light panel sizes and CCT available

Polar diagram

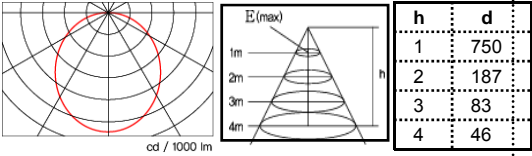

Dimensions



Description

