

GF S 03 T

Model name GFS03T (High illumination) (formerly R03T)
Size (mm) 600 x 600 x 24 (24" x 24" x ¾")
Power Consumption 75W (51 lm/W)
Available CCT 6300K, 5000K, 4500K, 4000K, 3500K, 2700K, +70+80 CRI
Illumination values 3850 lm @ 6300K (custom CCT/CRI available)
Material Aluminum anodized, polycarbonate, RoHS
Voltage VAC 95~240, 50~60 Hz
Control method IR Remote controller
Installation Kit. IK-01, IK-02, IK-03, IK-04, IK-05A, IK-06





Ver. 08.11

SP Certified to U_L 1598


www.goenergyeffective.com 416.679.0259
 © 2008 GO Lighting Technologies Inc.
 Custom light panel sizes and CCT available

Polar diagram



h	d
1	1980
2	495
3	220
4	123

Description

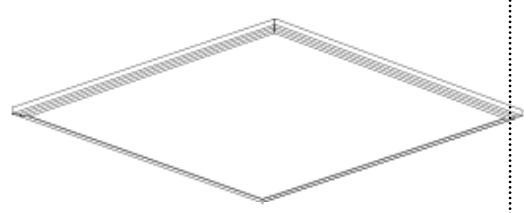

Dimensions

